

**Steel Barriers**



**Vulcan® Moveable Barrier**  
**Vulcan® Transfer Attachment**



**TRINITY**  
**HIGHWAY**

*Ahead of the Curve™*

# Vulcan® Moveable

The Vulcan® Moveable Barrier is a steel barrier comprised of light-weight, galvanized steel segments. It is NCHRP Report 350 Test Level 3 and Test Level 4 compliant, meets EN-1317 H2 and N2 specifications. The Vulcan Moveable Barrier is easily movable with the VTA (Vulcan Transfer Attachment) when connected to a skid steer or front end loader. Use of the VTA allows the operator to work from either side of the barrier.

## Assembly and Maintenance

- Sections can be easily changed if damaged during an impact.
- Installed anchored or freestanding.



# UNPARALLELED MOBILITY

## Features

- One mile of Vulcan Moveable Barrier can be opened or closed in approximately 20 minutes with the VTA.
- Rugged galvanized steel construction; durability and longevity even when moved multiple times.
- Ideal for use on bridge decks.
- Anchors with a variety of end treatments or can be used freestanding.
- Compatible with the Vulcan Gate.

## VTA Features


- Attaches to a standard skid steer or front end loader.
- Easily removed allowing the skid steer or front end loader to be used elsewhere in the work zone.

## Specifications Vulcan Moveable Barrier

- 2'8" (813 mm) High
- 13.5' (4.1 m) Long
- 1'10.5" (.546 m) Wide
- 1,020 lbs (460 kg) Per Section

## Specifications Vulcan Transfer Attachment

- 4'2" (1.27 m) High
- 3'10" (1.17 m) Long
- 108" (2.74 m) Skid Steer Width
- 1,160 lbs (526 kg) Skid Steer
- 120" (3.05 m) Front End Loader Width
- 1,450 lbs (658 kg) Front End

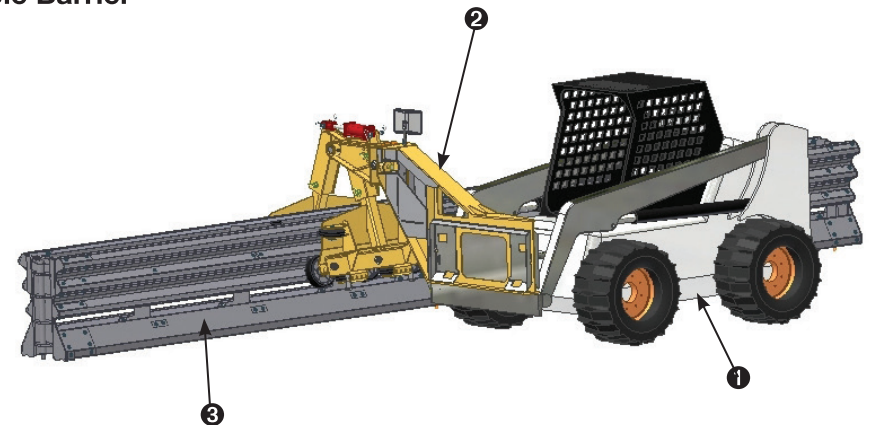

- 1 Standard Skid Steer
- 2 Vulcan Transfer Attachment (VTA)
- 3 Vulcan Barrier

An original  ENERGY ABSORPTION SYSTEMS, INC. product.

Distributed by:

**TRANSPO**  
INDUSTRIES, INC.  
[www.transpo.com](http://www.transpo.com)

20 Jones Street  
New Rochelle, NY 10801  
(914)636-1000

