

ARMOUR-GUARD BDM MMA WATERPROOFING AND CORROSION INHIBITION SYSTEM UNDER ASPHALT


MMA Bond Coat

Layer	Material	Application Rate	Thickness
1	Primer on substrate ¹	Armour-Guard Primer S or F	0.3 kg/m ² to 0.5 kg/m ² (80 ft ² /gal to 130 ft ² /gal)
	Broadcast aggregate	Quartz 0.3 to 0.7 mm (50/25 mesh)	0.3 kg/m ² (0.5 lbs/yd ²)
2	Membrane ² (1 or 2 layers)	Armour-Guard Membrane Manual Armour-Guard Membrane Spray	Minimum 2.4 kg/m ² (20 ft ² /gal)
	Bond coat ³	Armour-Guard Bond Coat	Minimum 1.0 kg/m ² (40 ft ² /gal)
3	Broadcast aggregate	Quartz 2.0 to 3.5 mm (10/6 mesh)	Minimum 1.0 kg/m ² (2 lbs/yd ²)

¹ Porous or uneven substrates may require multiple primer coats

² Membrane application rate/thickness: min 2.4 kg/m² (80 mils) for single layer; min 1.2 kg/m² each (40 mils each) for two layers

³ The Armour-Guard BDM MMA System is installed and finished ready to receive asphalt overlay. No further additional tack coat by others is required or should be used.

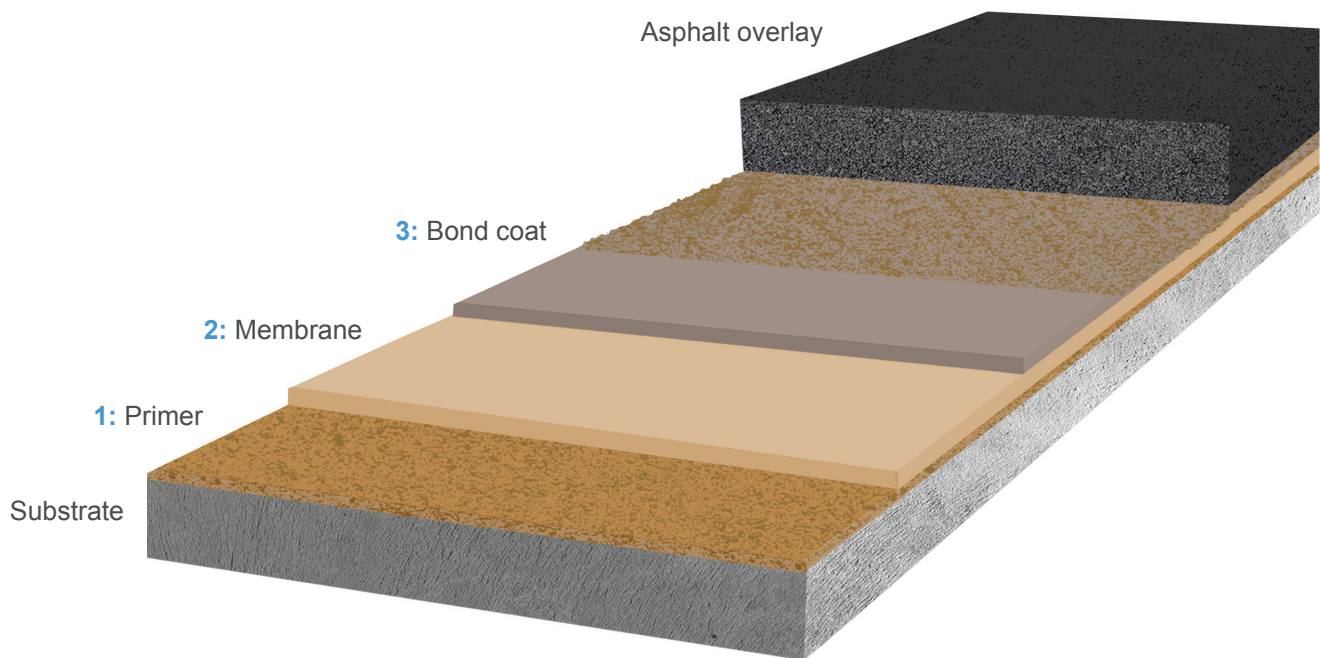

WARRANTY: The following warranty is made in lieu of all other warranties, either expressed or implied, and applies to goods manufactured by Transpo Industries, Inc. and its subsidiaries only. This product is manufactured of select raw materials by skilled technicians. Neither seller nor manufacturer has any knowledge or control concerning the purchaser's use of the product and no warranty is made as to the result of any use. The only obligation of either seller or manufacturer shall be to replace any quantity of this product that proves to be defective. Neither seller nor manufacturer assumes any liability for injury, loss, or damage resulting from use of this product.